


Number of conductors: 3

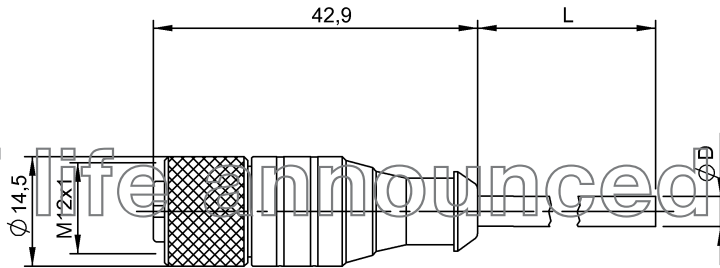

End of life announced

Electrical data

Operating voltage UB max. DC 240,0 V
 Switching function Normally open (NO)

Mechanical data

Connector type M12x1
 Number of pins 4
 Power indicator No
 Function indicator No
 Ambient temperature Ta -25 °C... 70 °C
 Enclosure Type per IEC 60529 IP67
 Grip material TPU, self-extinguishing
 Contact material CuSn
 Contact carrier material TPU, self-extinguishing

Cover nut material CuZn, nickel plated

Cable

Number of conductors 3
 Conductor cross-section 0,34 mm²
 Cable jacket material PVC
 Cable jacket color black
 Cable diameter D max. 4,9 mm
 Cable length 5,00 m


General

Approvals CE
 Enclosure type accord. to IEC 60529, when threaded together with the appropriate counterpart.



Definitions see general catalog

Subject to change without notice.



PIN 1: brown
 PIN 3: blue
 PIN 4: black

000000109674/525192/20090202