


The program for the  
Food & Beverage industry



Resistant to all common sour and  
alkaline cleaning and disinfectants  
agents



Food & Beverage

*plus*  
the new standard  
for the food-industry

Dust and waterproof in accordance  
with IEC 60529

**IP67**


Protected against water with high  
pressure and steam jet cleaning in  
accordance with IEC 60529




No hardening, no discolouring  
by cleaning through detergent-  
resistant, PVC-free plastics




Heat and cold-resistantly  
Service temperature range  
-40°C bis +105°C



Flame-adversely cable



Stand: 04\_06

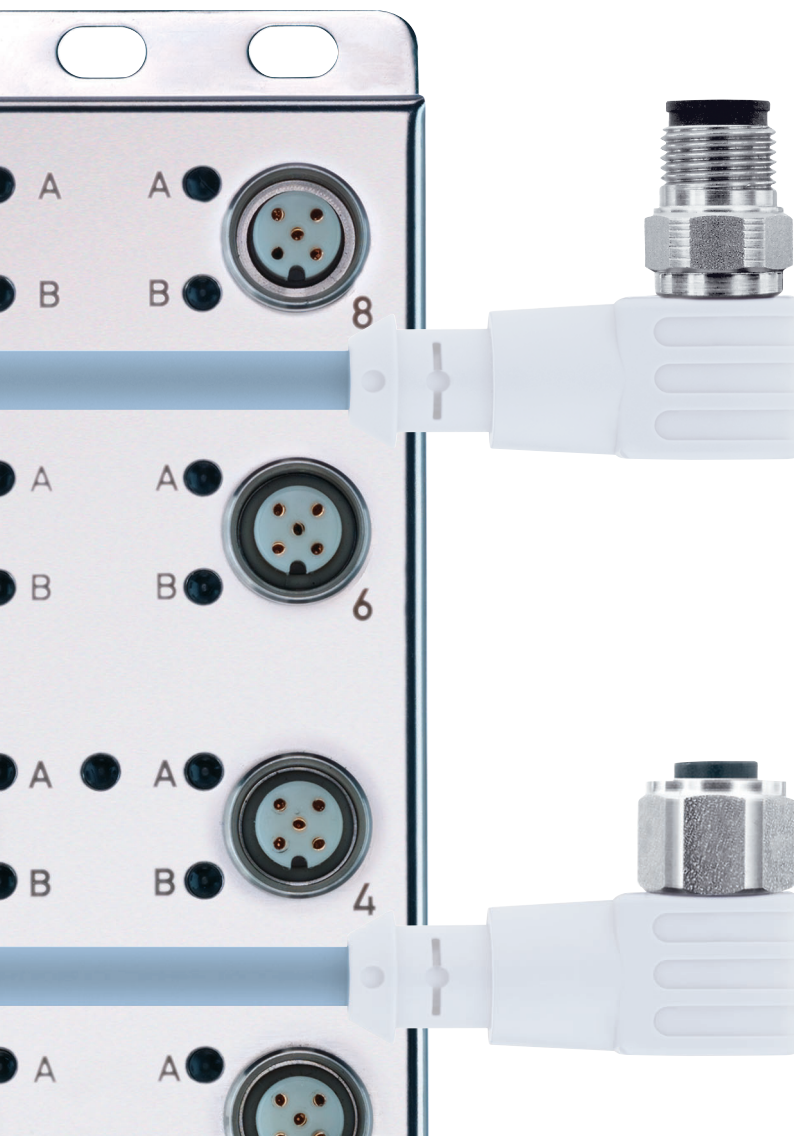

Standard-cable lengths*	Article designation		
5 m	FB-WAK4- 5/S 2300	M12x1 round connector coupling straight, 4-pole	
10 m	FB-WAK4-10/S 2300		
15 m	FB-WAK4- 15/S 2300		
5 m	FB-WAS4- 5/S 2300	M12x1 round connector plug straight, 4-pole	
10 m	FB-WAS4-10/S 2300		
15 m	FB-WAS4- 15/S 2300		
5 m	FB-WWAK4- 5/S 2300	M12x1 round connector coupling angled, 4-pole	
10 m	FB-WWAK4-10/S 2300		
15 m	FB-WWAK4-15/S 2300		
5 m	FB-WWAS4- 5/S 2300	M12x1 round connector plug angled, 4-pole	
10 m	FB-WWAS4-10/S 2300		
15 m	FB-WWAS4-15/S 2300		
5 m	FB-WAK4- 5-FB-WAK4/S 2300	Connecting cable	M12x1 coupling straight, 4-pole
10 m	FB-WAK4-10-FB-WAK4/S 2300		M12x1 coupling straight, 4-pole
15 m	FB-WAK4-15-FB-WAK4/S 2300		
20 m	FB-WAK4-20-FB-WAK4/S 2300		
5 m	FB-WAK4- 5-FB-WAS4/S 2300	Connecting cable	M12x1 coupling straight, 4-pole
10 m	FB-WAK4-10-FB-WAS4/S 2300		M12x1 plug straight, 4-pole
15 m	FB-WAK4-15-FB-WAS4/S 2300		
20 m	FB-WAK4-20-FB-WAS4/S 2300		
5 m	FB-WAS4- 5-FB-WAS4/S 2300	Connecting cable	M12x1 plug straight, 4-pole
10 m	FB-WAS4-10-FB-WAS4/S 2300		M12x1 plug straight, 4-pole
15 m	FB-WAS4-15-FB-WAS4/S 2300		
20 m	FB-WAS4-20-FB-WAS4/S 2300		
5 m	FB-WWAK4- 5-FB-WWAK4/S 2300	Connecting cable	M12x1 coupling angled, 4-pole
10 m	FB-WWAK4-10-FB-WWAK4/S 2300		M12x1 coupling angled, 4-pole
15 m	FB-WWAK4-15-FB-WWAK4/S 2300		
20 m	FB-WWAK4-20-FB-WWAK4/S 2300		
5 m	FB-WWAK4- 5-FB-WWAS4/S 2300	Connecting cable	M12x1 coupling angled, 4-pole
10 m	FB-WWAK4-10-FB-WWAS4/S 2300		M12x1 plug angled, 4-pole
15 m	FB-WWAK4-15-FB-WWAS4/S 2300		
20 m	FB-WWAK4-20-FB-WWAS4/S 2300		
5 m	FB-WWAS4- 5-FB-WWAS4/S 2300	Connecting cable	M12x1 plug angled, 4-pole
10 m	FB-WWAS4-10-FB-WWAS4/S 2300		M12x1 plug angled, 4-pole
15 m	FB-WWAS4-15-FB-WWAS4/S 2300		
20 m	FB-WWAS4-20-FB-WWAS4/S 2300		
0,5 m	FB-FK4-0,5/S 2300	M12x1 female, 4-pole with wire, PG9-thread	
0,5 m	FB-FS4-0,5/S 2300	M12x1 male, 4-pole with wire, PG9-thread	
	FB-FK4-L/S 2300	M12x1 female, 4-pole with soldering contact, PG9-thread	
	FB-FS4-L/S 2300	M12x1 male, 4-pole with soldering contact, PG9-thread	
	FB-8M12-5P3-15/P00	Actuator-/sensor-junction-system M12x1, 8-way with homerun-cable, I/O-ports 4-pole+PE, stainless-steel housing	

\* other cable lengths on request